


# RUBY-9717VGAR

Intel® Core™ 2 Quad processor based uATX Industrial Mainboard with onboard Dual-display, DDR2 SDRAM, VGA, Gigabit Ethernet, Audio and USB

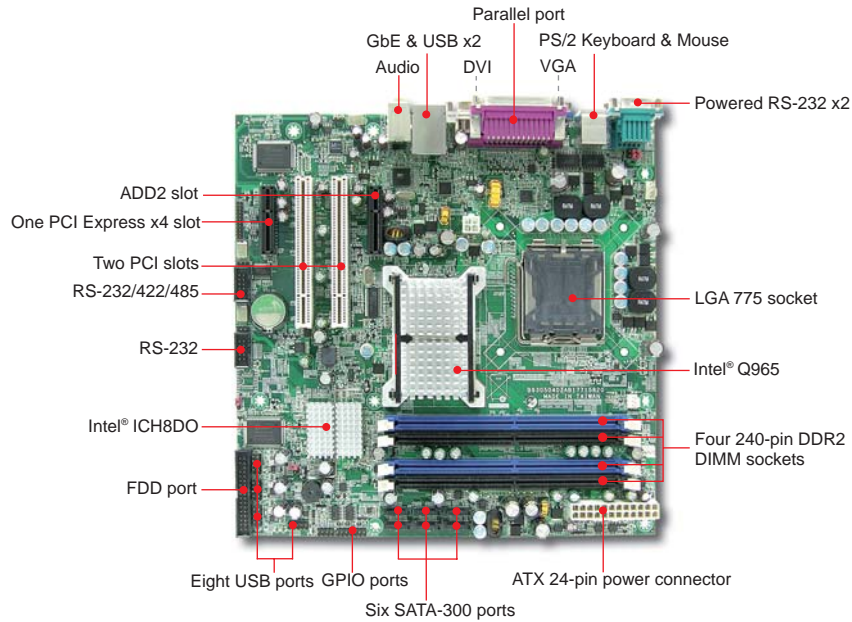

## FEATURES

- Industrial mainboard in uATX form factor that supports all Intel® mainstream desktop processors - Core™ 2 Quad, Core™ 2 Duo, Pentium® D, Pentium® 4, Celeron® D processor in LGA-775 package
- Onboard dual independent display: VGA and DVI
- One ADD2 graphics slot for ADD2 card
- One PCI Express x4 slot and two 32-bit PCI expansion slots
- Six SATA-300 ports support Intel Matrix Storage Technology with RAID 0, 1, 5, 10

## GENERAL

Processor	CPU & Package: Intel® Core™ 2 Quad, Core™ 2 Duo, Pentium® D, Pentium® 4, Celeron® D processor in the LGA-775 package FSB: 1066/800/533MHz
Chipset	Intel® Q965 and ICH8DO
System Memory	Up to 8GB DDR2 800/667/533 SDRAM on four 240-pin DIMM sockets
BIOS	Award BIOS
Storage Devices	Six SATA 300 ports with RAID 0 / 1 / 5 / 10 support by Intel Matrix Storage Technology
Solid State Disk	N/A
Watchdog Timer	Programmable via software from 1 sec. to 255 min.
Expansion Interface	- One ADD2 slot (single SDVO bus) - One PCI Express x4 slot - Two 32-bit PCI expansion slots
Hardware Monitoring	System monitor (fan, temperature, voltage)
Power Requirement	+12V(CPU)@3.31A, +12V(System)@5.82A, +5V(System)@5.95A
Dimension	Dimension : 243.8(L) x 243.8(W) mm; 9.6"(L) x 9.6" (W)
Environment	Operating Temperature: 0 to 60°C Storage Temperature: -20 to 80°C Relative Humidity: 5% to 90%, non-condensing
MTBF	TBD

## ORDERING GUIDE

<b>Standard</b>	RUBY-9717VGAR LGA-775 Core™ 2 Quad processor based uATX Industrial Mainboard with onboard dual-display, DDR2 SDRAM, VGA, Gigabit Ethernet, Audio and USB
-----------------	---

## I/O

MIO	Four serial ports(RS-232/Powered selectable x2 on rear panel, selectable RS-232/422/485 x1, RS-232 x1), one FDD, 12 GPIO
IrDA	N/A
Ethernet	- Single 10BASE-T/100BASE-TX/1000BASE-T Ethernet (Intel 82566DM) - PCI Express x1 interface based Gigabit Ethernet - Single RJ-45 connector with two LED indicators at rear I/O panel
Audio	HD Audio interface, 2-channel Audio
USB	Ten USB ports (Two ports at rear I/O panel; eight ports internal)
Keyboard & Mouse	PS/2 keyboard/mouse at rear I/O panel

## DISPLAY

Graphic Controller	- GMCH integrated Intel® Graphics Media Accelerator 3000 (Intel® GMA 3000) - ADD2 graphics slot (single SDVO bus) for ADD2 card - Onboard dual independent display VGA and DVI
--------------------	--